


## CODE : S010

80g COATED PAPER/WATER GLUE B-02/WHITE GLASSINE

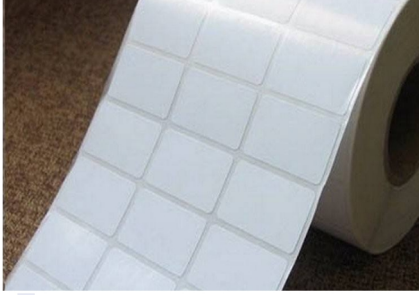

### Application

- Minimum labeling temp: 0°C  
Service temp : -20°C~100°C. (24h after labeling)
- Suitable for bar code printing, blank die-cutting label in conventional gloss.
- Must test to confirm if used in small bottle label (diameter smaller than 30mm).
- Rough surface substrate is not recommended.

### Print & Process

- Suitable for conventional printing.
- Full page printing is not recommend.

### Shelf life

From date of manufacture: 12 months, storage conditions: 23±2°C & relative humidity 50±5%. Prolonged storage outside these conditions might reduce the shelf life.

### Facestock

Coated paper , glossiness between matte & mirror.

Indicator	Parameter	Unit	Method
Substance	80±5%	g/m <sup>2</sup>	ISO536
Caliper	70±5%	μm	ISO534

### Adhesive

High-viscosity permanent emulsion acrylic adhesive

### Liner

Super calendered white glassine

Indicator	Parameter	Unit	Method
Substance	50±5%	g/m <sup>2</sup>	ISO536
Caliper	43±5%	μm	ISO534
Tear Resistance	≥300	mN	ISO 1924-2

### Performance data

Indicator	Parameter	Unit	Method
Initial Tack	≥14 or PT	N/25mm	FTM9, ss
90° Peel Adhesion (20min.)	≥7 or PT	N/25mm	FTM2, ss
Shear Min.	3	hours	FTM8, ss
Release force	10~40	G/25mm	FTM4, ss

### Statement:

- All the statements, tech information & recommendations are based on the tests believed to be reliable but do not constitute a guarantee or warranty. All products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.
- We reserve the rights of finally explanation.